



Installation Instructions for: 15. . +6) /



How to assemble video on YouTube. Search: Pecaso 3700-18+1

FRAME PARTS LIST:

- 1. Canopy Set
- 2. Branch Arm
- 3. Arm Bobeche
- 4. Top Centerpiece
- 5. Bottom Centerpiece

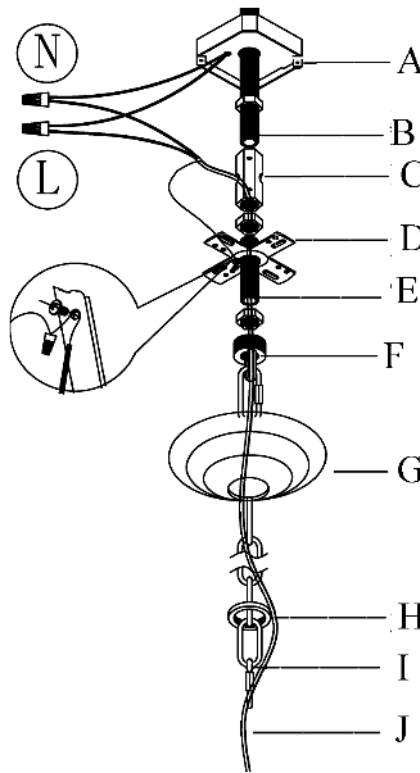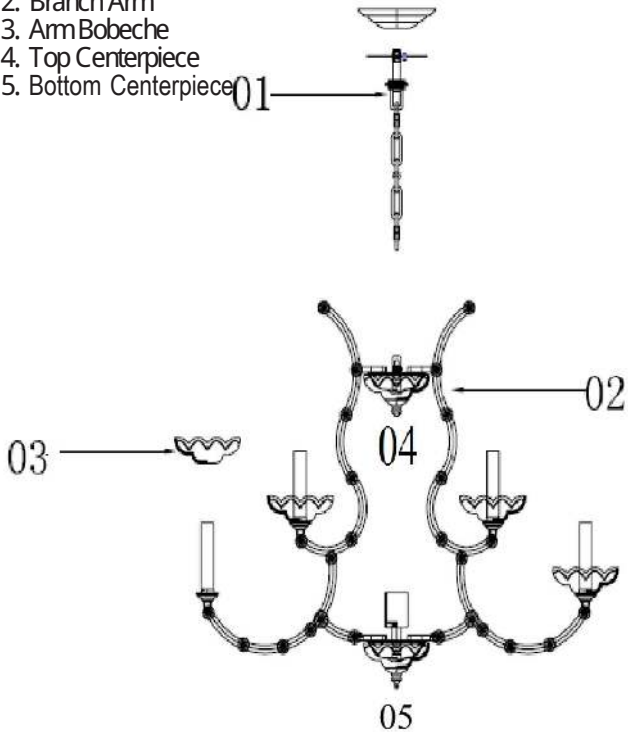

Need Help?

Phone Support: (855) 303-4500
Email Support: CS@LightingByPecaso.com
www.pwglighting.com

CANOPY PARTS LIST:

- A. Electrical Box (Not Included)
- B. Threaded Pipe
- C. Coupler
- D. Crossbar
- E. Threaded Pipe
- F. Loop
- G. Canopy Cover
- H. Canopy Nut Lock
- I. Chain
- J. Electrical Wire

DIMENSIONS:

Length: 28" No. of Lights 19
Width: 28" Weight: 55 lbs
Height: 30"

Bulb Type: E12

IMPORTANT SAFETY INSTRUCTIONS:

- 1. Use an authorized and certified electrician for consultation and installation.
- 2. The screws need to be screwed into a solid support structure inside the ceiling, which would require professional installation.
- 3. This fixture has been rated for 40-watt maximum E12 standard bulb.
- 4. To avoid the risk of fire, do not exceed the recommended wattage.
- 5. The manufacturer and distributor accepts no liability for incorrect installation.
- 6. For indoor use only.
- 7. Keep away from children.


WARNINGS:

- 1. Turn off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
- 2. All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
- 3. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
- 4. Deviation from instructions may result in a risk of fire or electric shock.

ASSEMBLY INSTRUCTIONS:

- 1. Begin by unpacking all contents onto a flat, padded surface. Then unwrap the plastic from all of the arms.
- 2. Detach the Top and Bottom Bobeches and Plates from the Top and Bottom Centerpiece, then use the screws included with each Centerpiece and attach both to any one of the arms. Afterwards, attach the remaining arms onto the Top and Bottom Centerpieces.
- 3. With all the arms attached, pass the wire bundles down through the slots on the Bottom Centerpiece. Then, with the guidance of a licensed installer, mount the included Canopy Set on your existing Electrical Box.
- 4. With the Canopy and chain attached, hang the assembled frame onto the chain before beginning the wiring process. Take a moment to adjust the space between arms and tighten screws.
- 5. Separate the wire bundles on the Bottom Centerpiece into L and N, then join all the L wires with each other, and then all the N wires with each other. Start by joining the Ls from the arms on the left into one bundle, then another bundle for the Ns. Repeat that step for the remaining arms. Afterwards, take the 4 bundles you should have, and join the 2 L bundles together, then do the same with the N bundles. Do not cap immediately, but you can secure the bundles with the included twist ties for now.
- 6. With the Bottom Centerpiece, pull the wire emerging from the top of one the arms, threading it down through the slot in the top centerpiece, then back up through the opening inside the loop before threading the electrical wire up along the chain.

(continue on next page)

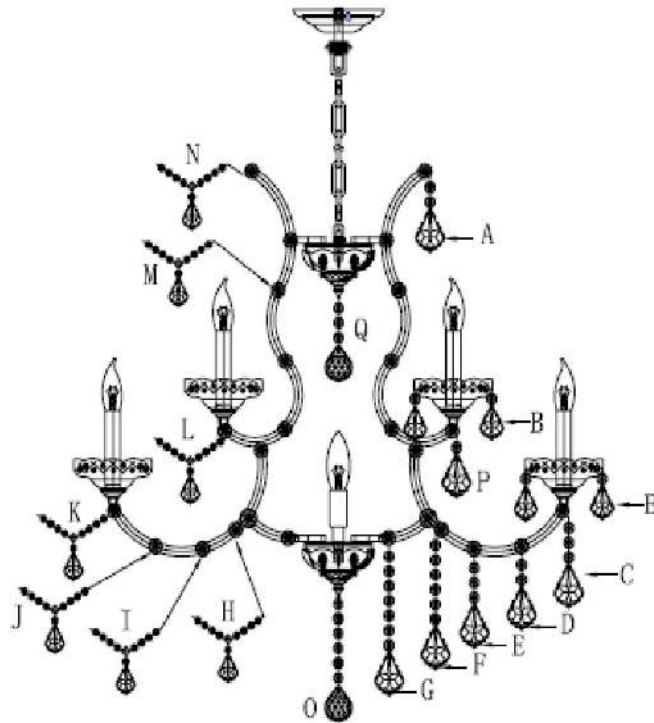

7. Place a Bobeche and candle cover onto each socket (you will have to remove the bulbs first), by slipping the Bobeche through first, and then the candle cover on top of it.

10. Now you may begin to attach the crystal dressing. Starting from Letter A, begin attaching each crystal strands to the spot show on the included diagram by passing the pin through the available hole or loop, then pinching it down to secure. If a crystal strand shows two ends on the diagram, then that strand should be connected from one arm to a matching spot on the arm beside it.


CARE INSTRUCTIONS:

1. Make sure that the power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth or feather duster to remove dust.
3. If dust does not wipe off, remove the dirty crystals and soak in cleaning solutions for 20 minutes. Do not return crystals to fixture while wet. Do not use corrosive or ammonia-based cleaners.


MODEL NUMBER

3700-18+1


CRYSTAL DETAIL

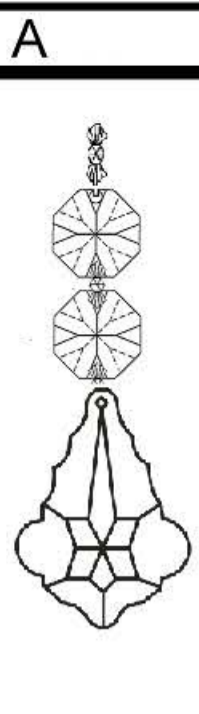


QUANTITY: 6

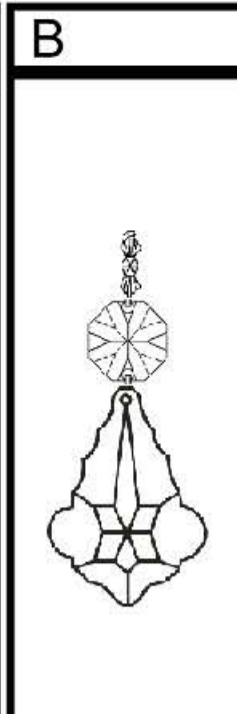


QUANTITY: 90

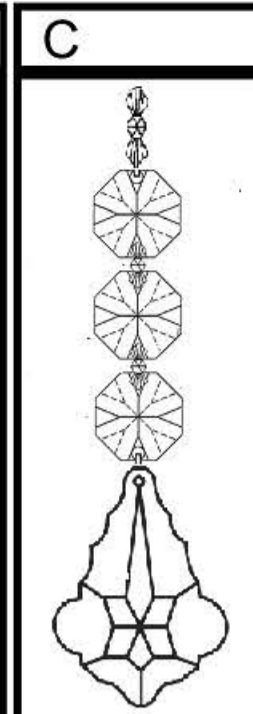


QUANTITY: 12

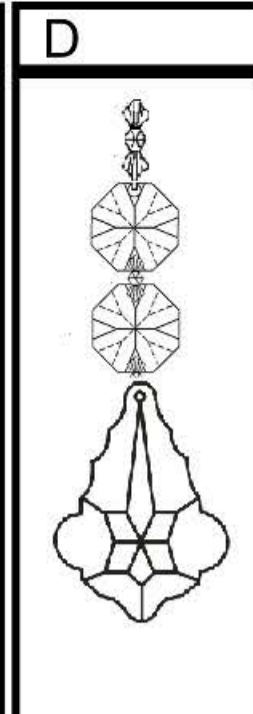


QUANTITY: 12

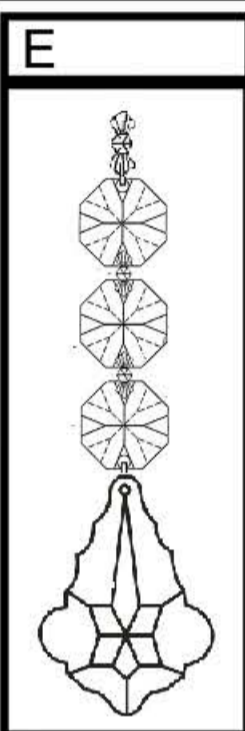

QUANTITY: 12

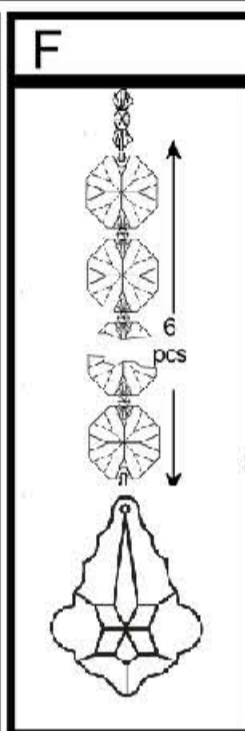

QUANTITY: 6

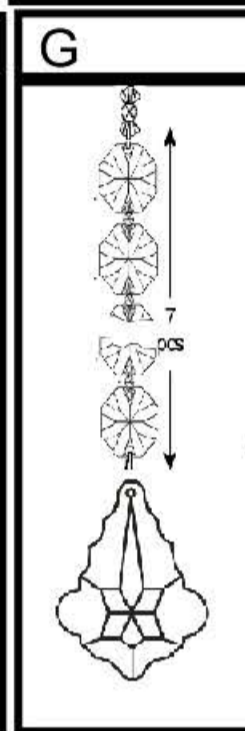

QUANTITY: 6



QUANTITY: 6



QUANTITY: 6



QUANTITY: 6



QUANTITY: 12




QUANTITY: 6




QUANTITY: 6




QUANTITY: 6

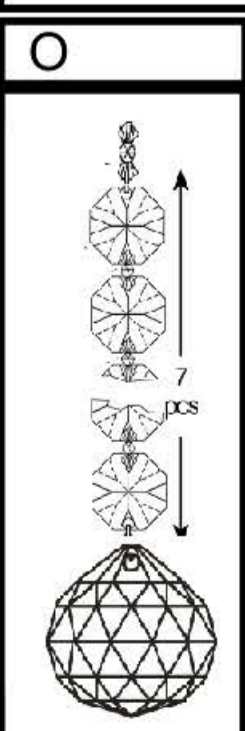

QUANTITY: 1

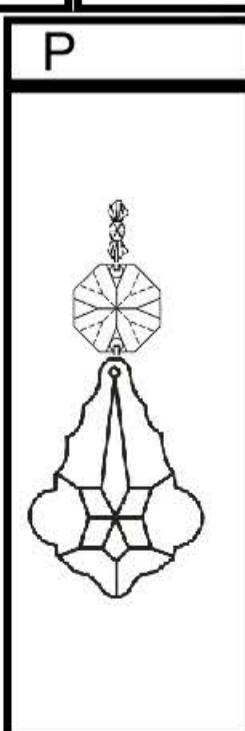

QUANTITY: 6

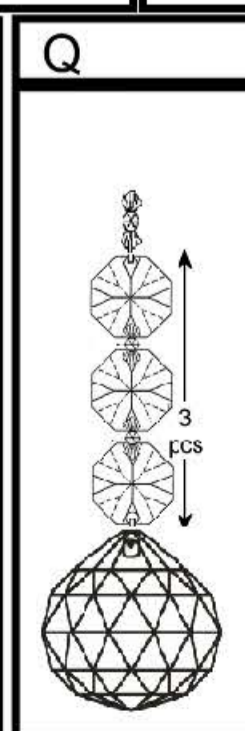

QUANTITY: 1