



Installation Instructions for: 4701-28

FRAME PARTS LIST:

- 1. Electrical Box (not included)
- 2. Electrical Wire
- 3. Ground Wire
- 4. Threaded Pipe
- 5. Crossbar
- 6. Crossbar Screws (not included)
- 7. Canopy
- 8. Canopy Nut Lock
- 9. Chain
- 10. Loop
- 11. Crown
- 12. Main Pipe
- 13. Main Body

DIMENSIONS:

Length: 28"
 Width: 28"
 Height: 36"
 Weight: 61 lbs
 Bulb Type: E12
 No. of lights: 14

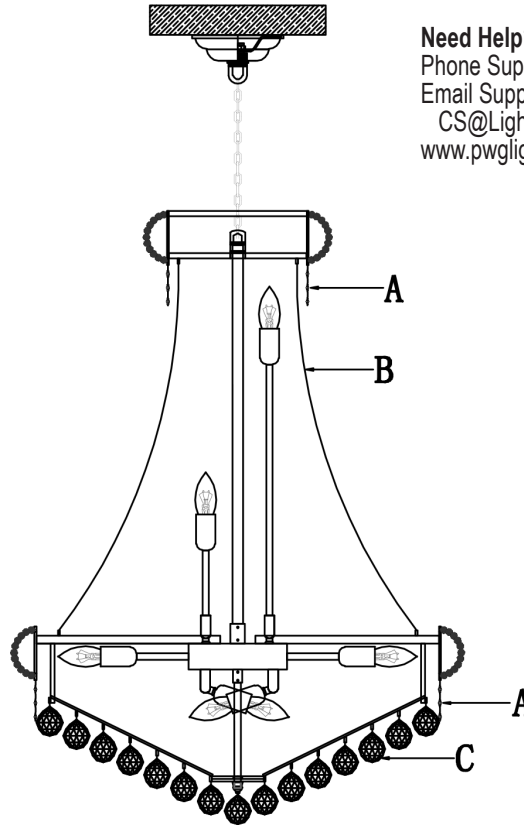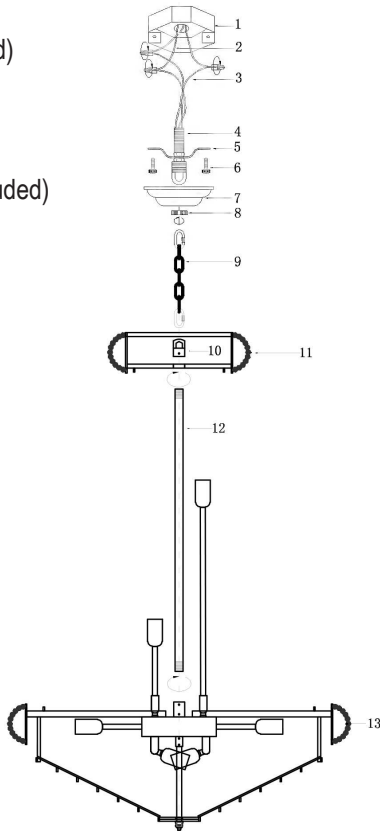

Need Help?

Phone Support: (855) 303-4500
 Email Support:
 CS@LightingByPecos.com
 www.pwglighting.com

IMPORTANT SAFETY INSTRUCTIONS:

- 1. Use an authorized and certified electrician for consultation and installation.
- 2. The screws need to be screwed into a solid support structure inside the ceiling, which would require professional installation.
- 3. This fixture has been rated for 40-watt maximum E12 standard bulb.
- 4. To avoid the risk of fire, do not exceed the recommended wattage.
- 5. The manufacturer and distributor accepts no liability for incorrect installation.
- 6. For indoor use only.

WARNINGS:

- 1. Turn off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.
- 2. All wires are connected. Do not remove the ceiling light from its packaging by pulling on the power cord, as a bad connection may result.
- 3. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
- 4. Deviation from instructions may result in a risk of fire or electric shock.


ASSEMBLY INSTRUCTIONS:

- 1. Remove fixture frame and white crystal packaging from box.
- 2. Remove the Loop from the top of the Main Pipe, then begin to push the electrical wires emerging from the Main Body through the Main Pipe. Once the wires have been entirely passed through, screw the Main Pipe into the Main Body until tight. (Note: After passing the wires through the pipe, hold taut while you screw the threaded end of the Main Pipe into the frame's Main Body to avoid the wires from twisting.)
- 3. With the Main Pipe affixed and the wires passed through, affix the Crown onto the top of the Main Pipe, and then secure with the Loop that had been previously removed. Throughout this, make sure to pull the electrical wires through the Crown as well as the Loop. Once all parts have been affixed, the electrical wires should be hanging through the Loop.
- 4. With the Main Pipe and Crown affixed to the top of the Main Body, Frame assembly is now complete. Hang the frame on the matching chain and ceiling canopy after mounting to an existing electrical box using the screws from your electrical box. Thread the electrical wire and ground wire up along the loops of the matching chain and wire to your existing electrical box with the guidance of a licensed electrician or handyman. Test that all lights turn on before proceeding to crystal dressing.
- 5. With the frame installed, dress the frame with the included crystal dressing A through C as shown in the diagram, passing the metal pins attached to the crystals through each hole and then pinching the pin closed.

CARE INSTRUCTIONS:


- 1. Make sure that the power is turned off and bulb has cooled before handling.
- 2. Wipe clean with a dry cloth or feather duster to remove dust.
- 3. If dust does not wipe off, remove the dirty crystals and soak in cleaning solutions for 20 minutes. Do not return crystals to fixture while wet. Do not use corrosive or ammonia-based cleaners.

4701-28

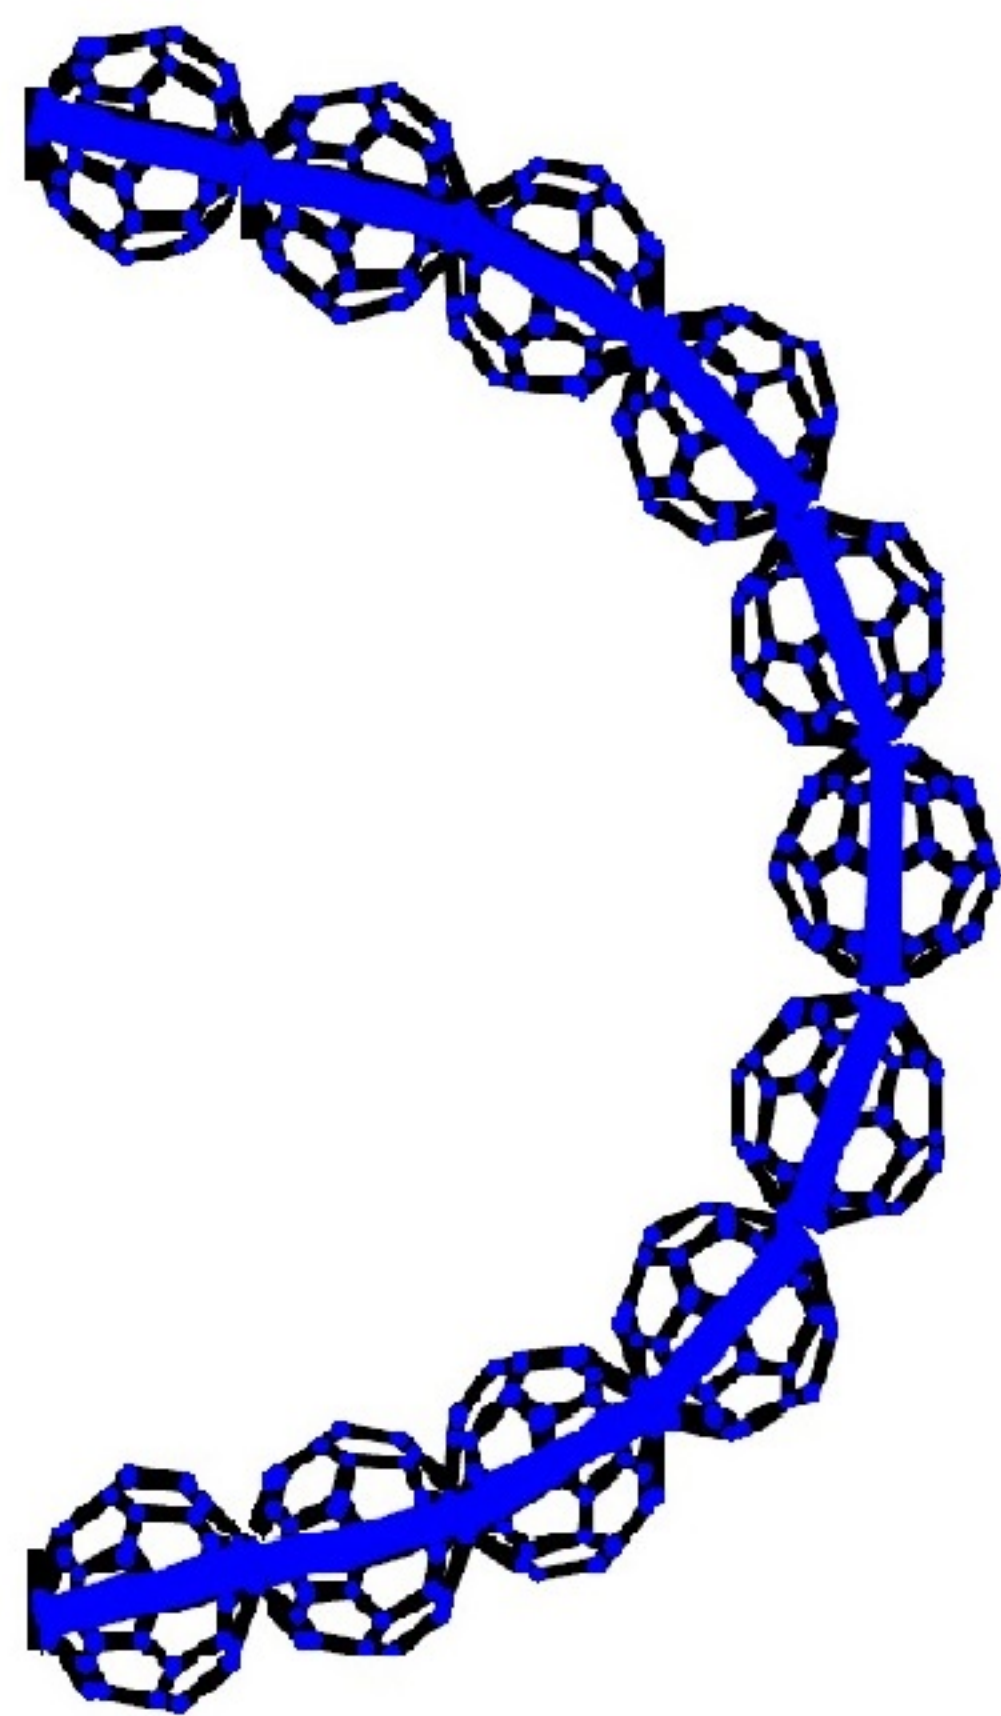


PRE-ATTACHED

A

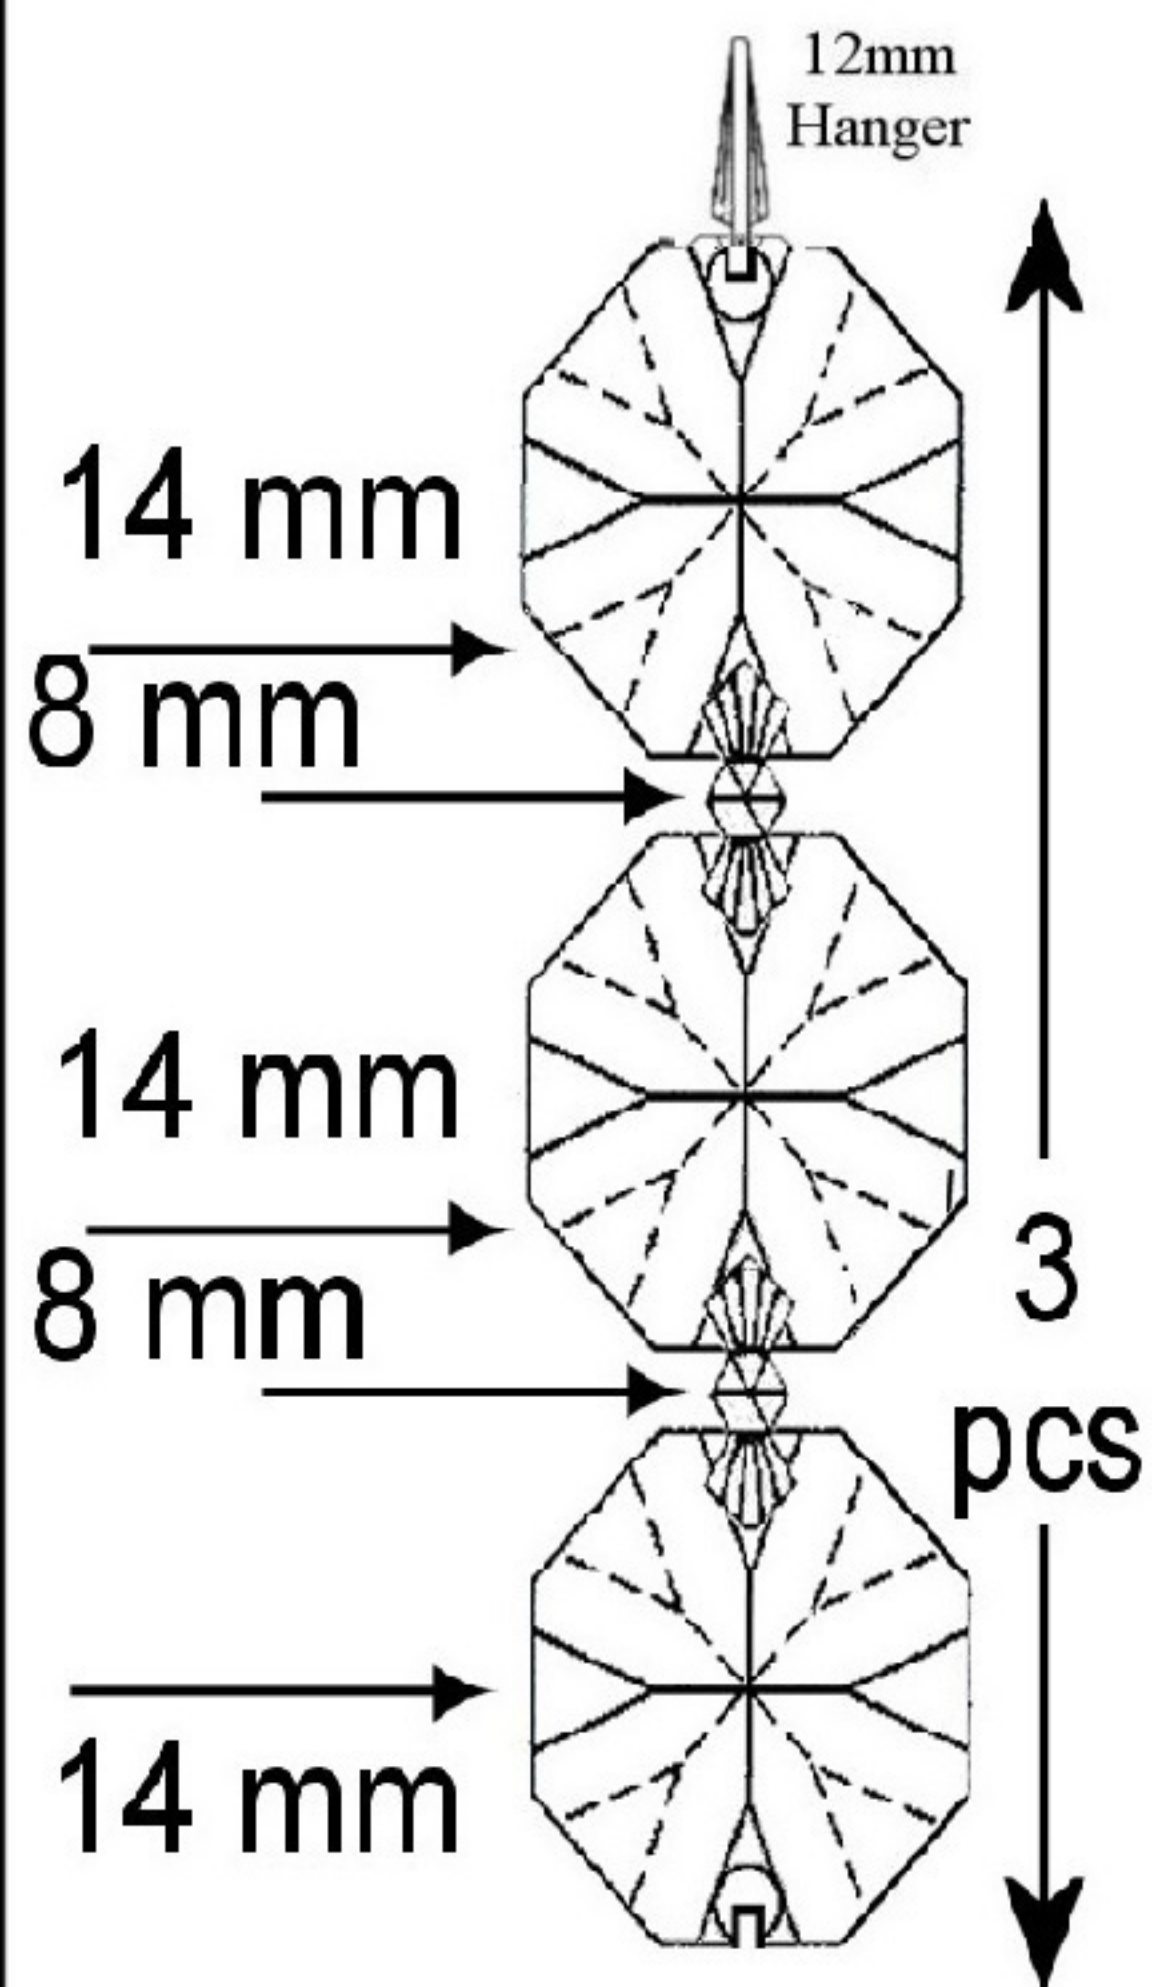


162 PCS

B

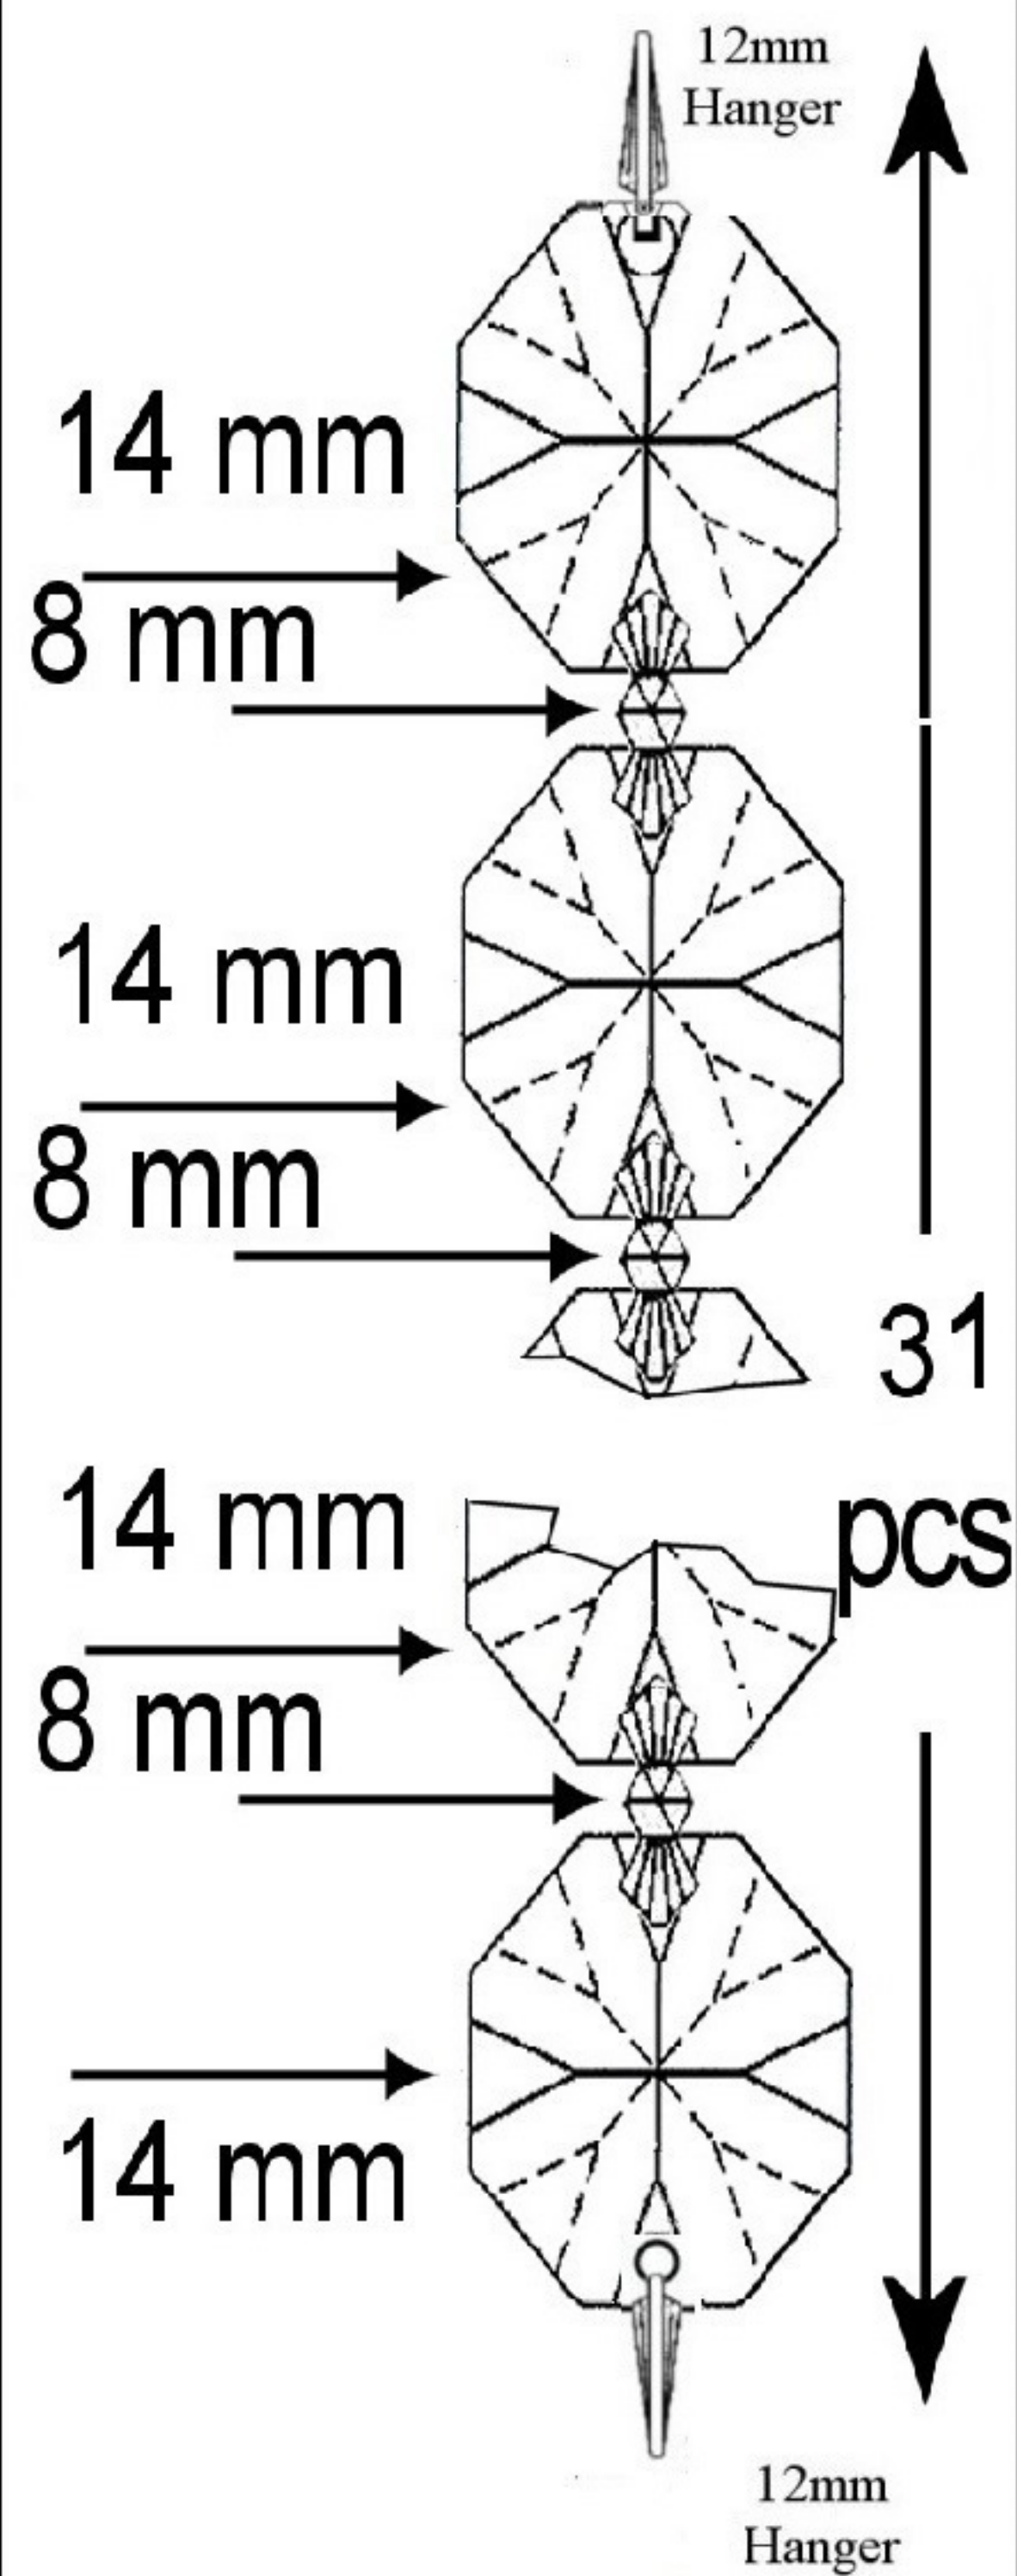

42 PCS

C

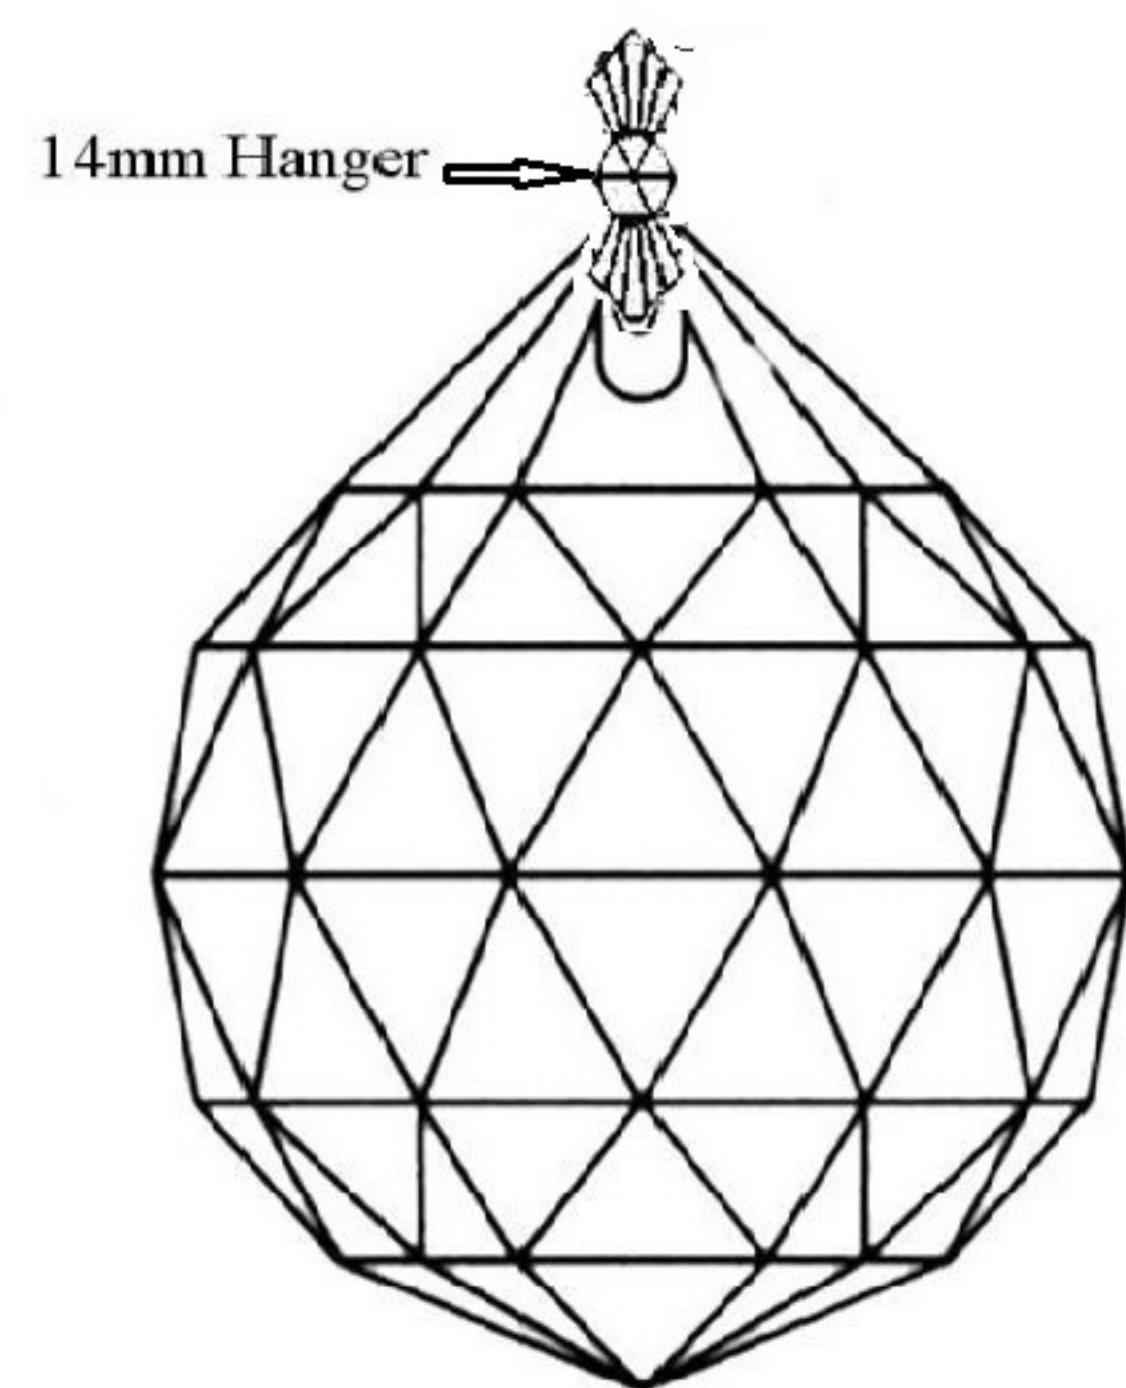

169 PCS